

PK094A

Light Pole Kit with Single Adjustable LED Light, Selectable Wattage 150/200/240/300 & Color Temperature, 20-30 Foot Pole Height Options



Job: _____
 Job Site: _____ State: _____ Client Name: _____
 Notes: _____ Approvals: _____ Date: _____

Commercial-grade LED Light Pole Assembly Includes:

Square steel light pole, Single LED light complete with adjustable slip fitter and hardware, set of anchor bolts and a base cover.

Light Pole:

Pole Shaft: Commercial grade steel with minimum yield strength of 55,000 psi.

20 ft. poles: 4" square X 11 gauge; 25 ft. poles: 4" square X 7 gauge;

30 ft poles: 5" square X 7 gauge.

Pole Height: Standard pole height is 20 ft. Optional heights are 25 ft. and 30 ft.

Custom heights are also available.

Anchor Bolts: A set of 4 galvanized steel anchor bolts is provided.

Each anchor bolt includes 2 nuts and 2 washers.

Bolt Circle: 4"sq. Pole: 8-1/2" Bolt Circle (Bolt Circle range: 8"-11").

30 ft poles: 11" Bolt Circle (Bolt Circle range: 10" - 12")

Handhole: 3" X 5" size reinforced handhole is located at 18 inches from the base. A ground lug with set screw is located near the handhole opening for proper grounding of the pole.

Color: Dark Bronze

Base Cover: ABS Plastic base cover with rivets.

Warranty: 1 Year

LED Fixture:

Material: Aluminum construction with integrated fins to maximize heat dissipation.

Color: Dark Bronze.

Preset Power: 300 Watts

Voltage: 120-277 Volt standard.

Selectable Colors: 3000K; 4000K; 5000K

Preset Color Temperature: 5000K.

Light Distribution: Type 3 standard.

Type 4 and Type 5 options as special order.

Photocell: Photocell is optional.

Dimming: 0-10V Dimming Capable.

Dimming control not provided (field install).


UL Listing: UL Listed for Wet Locations.

DLC Listing: DLC Premium.

IP Rating: IP66

EPA Rating: 0.7 ft²

Warranty: 5 Years.

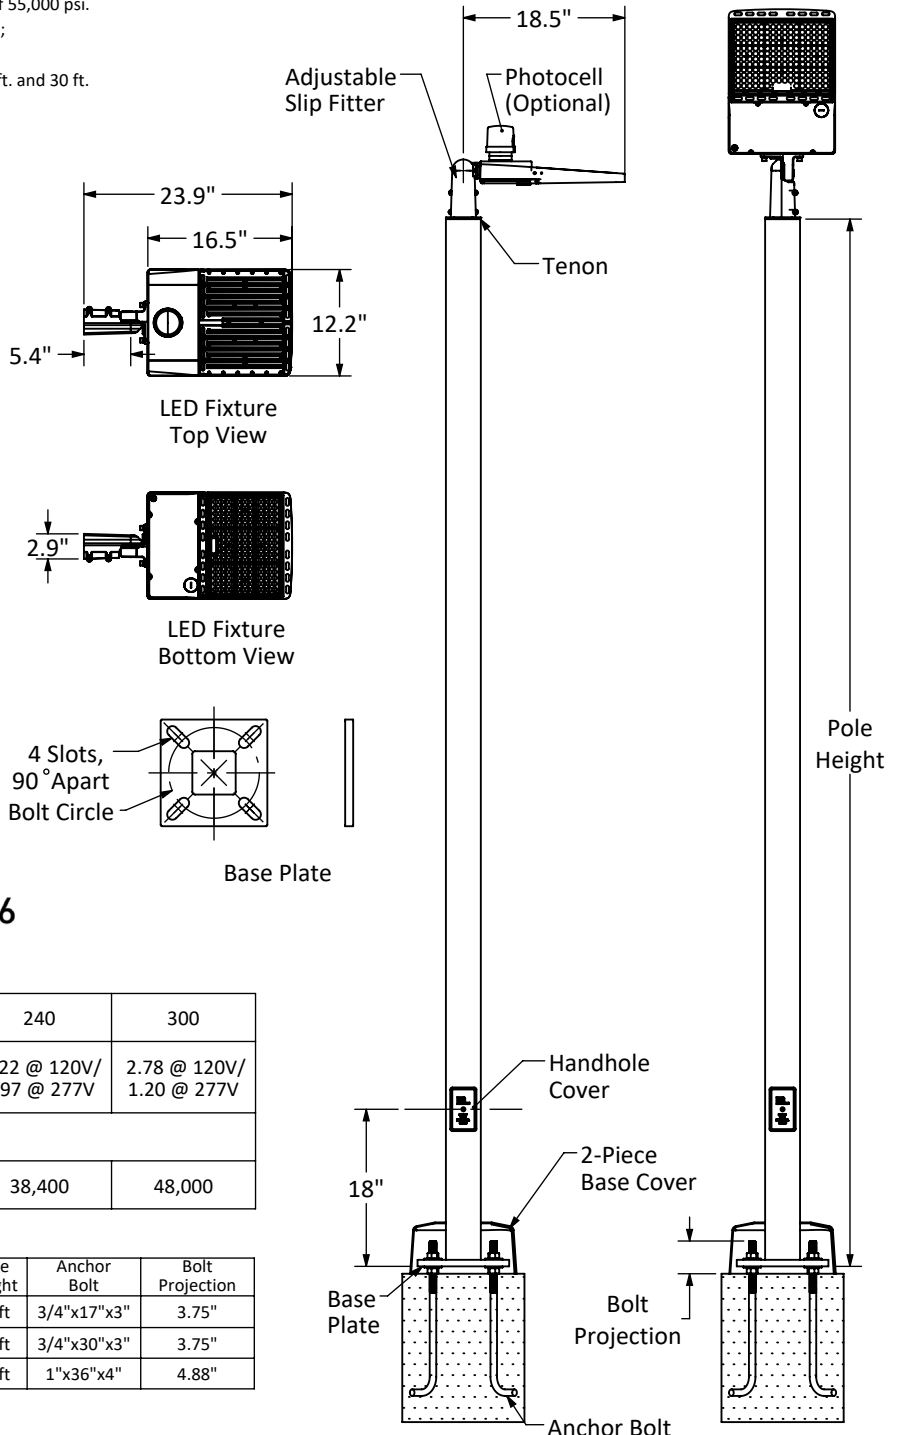

| POWER (W) | 150 | 200 | 240 | 300 |
|-------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| AMPS | 1.39 @ 120V/ 0.60 @ 277V | 1.85 @ 120V/ 0.80 @ 277V | 2.22 @ 120V/ 0.97 @ 277V | 2.78 @ 120V/ 1.20 @ 277V |
| LUMENS/WATT | 160 | | | |
| LUMENS | 24,000 | 32,000 | 38,400 | 48,000 |

| Pole Height | Base Plate Dim | Slot Dim | Bolt Circle |
|--------------|-------------------|--------------|-------------|
| 20 ft, 25 ft | 10.5" Sq. x 0.75" | 0.98" x 2.5" | 8.5" |
| 30 ft | 11" Sq. x 1" | 1.15" x 1.9" | 11.0" |

| Pole Height | Anchor Bolt | Bolt Projection |
|-------------|-------------|-----------------|
| 20 ft | 3/4"x17"x3" | 3.75" |
| 25 ft | 3/4"x30"x3" | 3.75" |
| 30 ft | 1"x36"x4" | 4.88" |

Disclaimer: All dimensions and specifications are subject to change without any notice. Light Pole Foundation should be designed by an engineer familiar with local soil and wind conditions as well as local code where the light pole will be installed.